

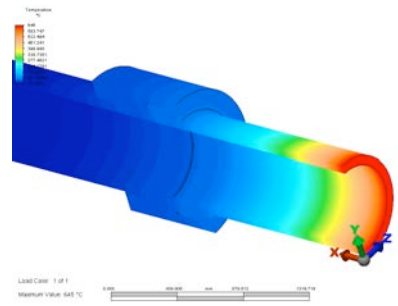


SPECIAL INSULATING JOINTS – range and manufacturing capability

- Designed, manufactured and tested in compliance with purchaser specifications
- Sizes from 1/2" to 130"
- Operating pressure up to 1000 Bar
- Electrical resistance in air at 1000 V dc ≥ 200 Mohm
- Dielectric strength test (ac 50 Hz) up to 40KV
- Operating temperature up to 250°C
- Available with materials matching pipelines in carbon steel (up to grade API5L-X100), austenitic stainless steel, duplex stainless steel, with inconel or incolloy internal cladding, etc.
- For gas, oil, water, sour service and other special ones.
- Available with weld ends, flanged ends, thread ends, connection lugs.
- **Monolithic construction**
- **Symmetric U shape Double Sealing Gasket System**
- **Boltless and "O"-Ring free**

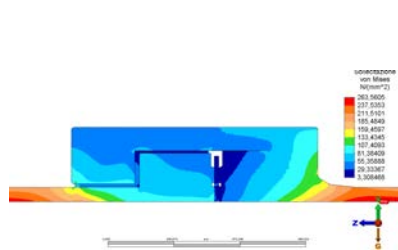

Scheda tecnica / Technical data sheet : NGSPC-01 rev.2 issued 08/08/12 pag. 1/1

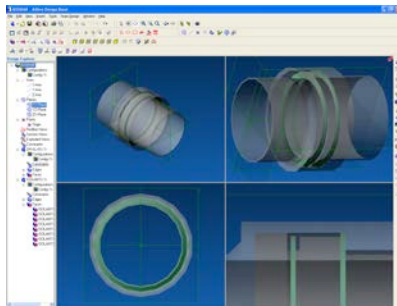

Nuovagiungas srl
 41043 FORMIGINE (MO) Italy via A. Moro 26/28
 Tel.059-578611-Fax 059-570633-Email ng@nuovagiungas.com



II 2 GD Zona 1 e 21 d T6
 Tech. file N° AX001 (Notified body N°1370)



ISO 9001:2008
 Quality management System Approved
 Certificate No.: LRC 160036